

Instructions for the disassembly of the hawos small/big mill:





1. Unscrew the hopper.



2. Unscrew the four screws on the top of the housing.



3. Lift the motor and the top housing out of the drawer.



4. To access the mill stones, unscrew the screws which hold the housing around it together. To find the screws easier, try brushing away the flour which often acts like a seal over the screws.



5. Lay the mill on its side, so that the millstones are facing you.

6. Hold the motor shaft with the help of an Allen key in position and turn the mill stone anti-clockwise till it comes off. As a helpful hint: try warming up the stones with a blow dryer or put a little bit of oil onto the shaft for easier disassembly.




a)



b)

7. To remove the stationary mill stone, remove the remaining screws - four on each side.

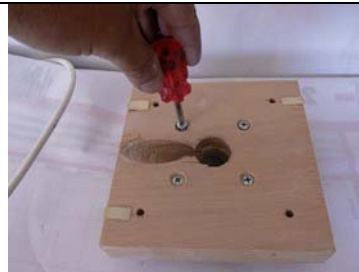

c)